


SAGOLA

an Elcometer company



SAGOLA SPRAYGUNS APPLICATION GUIDE FOR BODYSHOP

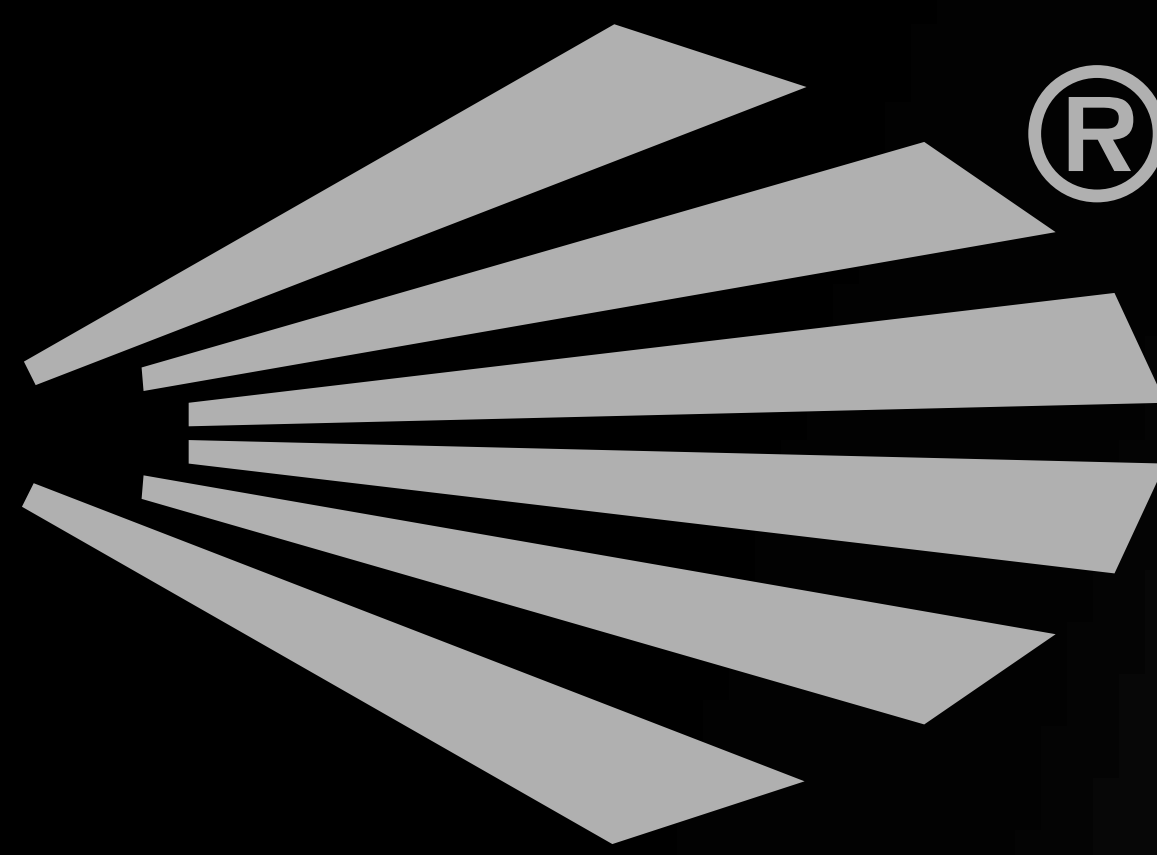

		FINISHES				FILLERS AND PRIMERS			
		HS CLEARCOATS & SINGLE STAGE	CLEARCOATS EXPRESS DRYING	WATERBORNE BASECOATS	SOLVENT-BASED BASECOATS	WET ON WET FILLERS	PRIMERS, REPAINTING FILLERS	HS FILLERS High thickness	GUN-APPLIED MASTICS
4600 XTREME	Xtreme finishes	AIRCAP System/Transfer							
		DVR CLEAR EPA Transfer 65%	1.30 - 1.30 XL 2.0 - 2.4 bar	1.20 - 1.20 XL 2.0 - 2.2 bar			1.20 - 1.30 XL 2.0 - 2.2 bar		
		DVR AQUA EPA Transfer 65%			1.20 - 1.20 XL 1.5 - 2.0 bar	1.30 1.5 - 2.0 bar			
		DVR HVLP HVLP Transfer 75%			1.20 - 1.30 1.8 - 2.0 bar	1.30 1.8 - 2.0 bar			
MINI XTREME	Spot Repair	DVR titania PRO EPA Transfer 65%	1.30 - 1.30 XL 2.0 - 2.4 bar	1.20 - 1.20 XL 2.0 - 2.2 bar			1.20 - 1.20 XL 2.0 - 2.2 bar		
		mini AQUA EPA Transfer 65%			1.00 1.0 - 1.5 bar	1.00 1.0 - 1.8 bar	1.00 1.0 - 2.0 bar		
		mini HVLP HVLP Transfer 75%	1.20 1.8 - 2.0 bar	1.00 - 1.20 1.8 - 2.0 bar	1.00 1.0 - 1.5 bar	1.00 1.0 - 1.8 bar	1.00 1.8 - 2.0 bar		
		mini EPA EPA Transfer 65%	1.20 1.8 - 2.0 bar	1.00 - 1.20 1.8 - 2.0 bar					




3300 GTO CAR	Fast/Robust	GTO TECH EPA Transfer 65%	1.40 2.0 - 2.4 bar	1.30 2.0 - 2.4 bar	1.20 - 1.30 1.8 - 2.0 bar	1.30 - 1.40 1.8 - 2.0 bar	1.30 - 1.40 2.0 - 2.2 bar		
		GTO HVLP HVLP Transfer 75%			1.30 - 1.40 2.0 bar	1.30 - 1.40 2.0 bar			
3300 GTO	Maximum performance	GTO EVO EPA Transfer 65%				1.30 - 1.40 2.0 bar			
		GTO HVLP HVLP Transfer 75%					1.60 1.8 - 2.0 bar	1.60 - 1.80 1.8 - 2.0 bar	
		GTO EPA EPA Transfer 65%					1.30 - 1.40 2.0 - 2.2 bar	1.40 - 1.60 1.8 - 2.0 bar	1.60 - 1.80 1.6 - 2.0 bar



		AIRCAP System/Transfer	FINISHES - HIGH GLOSS CLEARCOATS & SINGLE STAGE	BASECOATS METALLIZED	INDUSTRIAL FINISHES CLEARS - ESTRUCTURES - CHASSIS	PRIMERS FILLERS
			4100 XTREME PRESSURE	Industrial vehicles	XT03 HVLP Transfer 75%	
4100 XTREME SUC.	Maximum speed	XT01 B EPA Transfer 65%	1.00 - 1.20 2.0 - 2.5 bar (air inlet) 0.8 - 1.5 bar (product)	0.80 - 1.00 2.0 bar (air inlet) 0.5 - 1.0 bar (product)	1.00 - 1.20 2.0 bar (air inlet) 1.0 - 1.5 bar (product)	1.20 - 1.40 2.0 bar (air inlet) 1.5 - 2.0 bar (product)
		765 Conventional Transfer 55%	1.20 3.0 - 3.5 bar (air inlet) 0.8 - 1.5 bar (product)		1.20 2.5 - 3.0 bar (air inlet) 1.0 - 1.5 bar (product)	1.20 - 1.40 2.5 - 3.3 bar (air inlet) 1.5 - 2.0 bar (product)
		777 Conventional Transfer 55%	1.00 - 1.20 3.0 - 3.2 bar (air inlet) 0.8 - 1.5 bar (product)	1.00 2.5 - 3.0 bar (air inlet) 0.5 - 1.0 bar (product)		
		96 Medium pressure	1.60 2.8 - 3.0 bar	1.40 - 1.60 2.5 - 2.8 bar	1.60 2.5 - 3.0 bar	1.60 2.5 - 3.0 bar
		XT01 EPA Transfer 65%	1.60 - 1.80 2.0 - 2.5 bar	1.60 2.0 bar	1.60 - 1.80 2.0 bar	1.60 - 1.80 2.0 bar

www.sagola.com

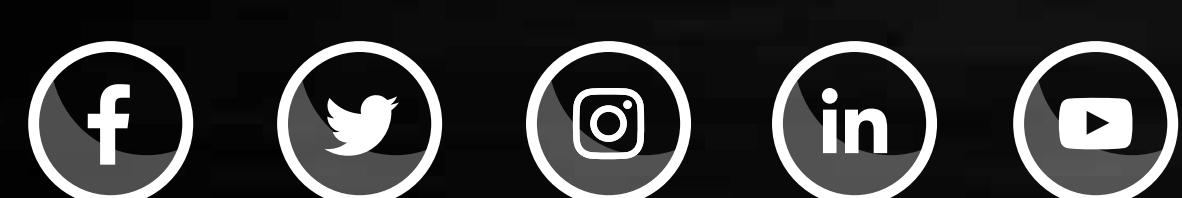

MADE IN SPAIN